
# Interactive Display

## FP1465W Datasheet

With Built-in 4K 50MP Camera,
8 Array Microphone Auto Voice & Face Tracking

eclipse® Presentation Systems
A CLOUD COMPANY PRODUCT

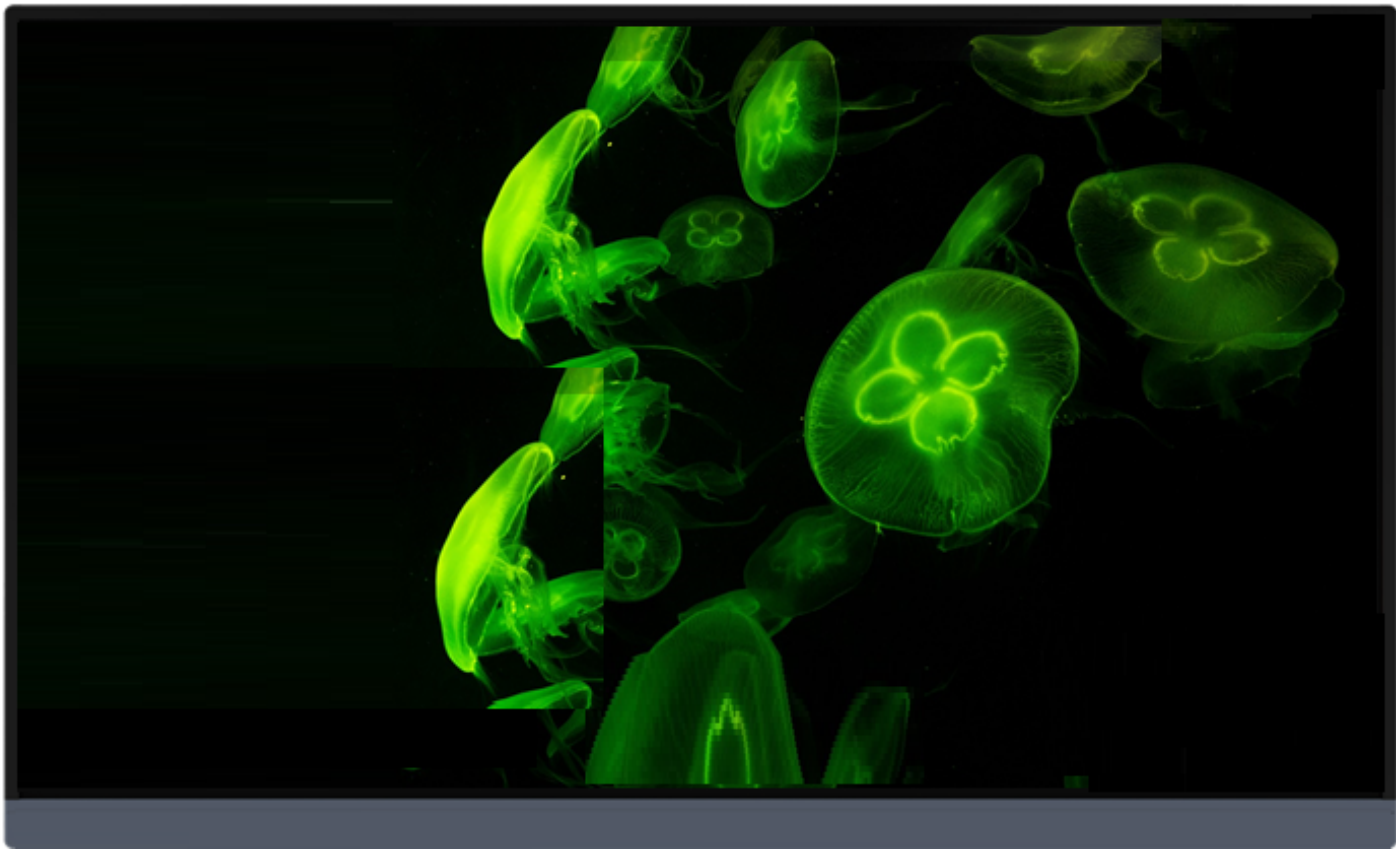

Nedo Pakistan
Leading IT Company

KARACHI | LAHORE | ISLAMABAD

www.nedopakistan.com
UAN : 021-111-633-675



OPS PC Module



20+ Points Touch



Wireless Sharing

Windows + android

*Disclaimer: The product specifications, designs and solutions are subject to change without prior notice & availability. To know more contact Local Dealer in your region

cloud
**Guangzhou Cloud Electronic Co.**
1st Floor, C19 Building, Huachuang Animation Industrial Park, Jinshan Cun, Shiqi Town, Panyu District, Guangzhou, China
Emal: info@cloud-sol.com

# Interactive Display

## FP1465W Datasheet

With Built-in 4K 50MP Camera,
8 Array Microphone Auto Voice & Face Tracking

eclipse® Presentation Systems
A CLOUD COMPANY PRODUCT

*Disclaimer: The product specifications, designs and solutions are subject to change without prior notice & availability. To know more contact Local Dealer in your region

| DISPLAY | |
|---|---|
| Screen Type | D-LED |
| Aspect Ratio | 16:9 |
| Size | 65 inch |
| Resolution | 3840(H) x 2160(V) |
| Response Time | 4 ms |
| Refreshing Frequency | 60Hz |
| Display color | 1.07B (10bit) |
| Pixel Pitch | 0.372mm x 0.372mm |
| Brightness | 500cd/m² |
| Contrast Ratio (Dynamic) | 5000:1 |
| Viewing Angle | 178° (H/V) |
| Lifetime | 50,000 hours |

| TOUCH SYSTEM | |
|---|---|
| System | Windows 10/11, Linux, Mac, Chrome, Android |
| Sensing Type | IR Touch - 20 Points |
| Response Time | <4 ms |
| Accuracy | 2mm |
| Communication Mode | Full-speed USB |
| Interface | USB |
| Surface Hardness | Explosion Proof, Anti Glared Tempered Glass, Hardness 8H |
| Output Coordinates | 32767 x 32767 |

| DISPLAY CONNECTORS | |
|---|---|
| Front Ports | HDMI in*1 , Touch Port *1 , USB*4, Type C charge port*1 |
| Rear Ports | HDMI in*2,HDMI out*1, USB 3.0*1,USB 2.0*1, Touch USB*1, |
| RJ45 | 1 |
| Earphone | 1 |
| COAXIAL OUT | 1 |
| TF CARD | 1 |
| AUDIO IN & OUT | Audio in, VGA in, AV in, AV out |
| RS232 | 1 |

| ANDROID SYSTEM | |
|---|---|
| OS | Android 14, A55*8 Octa core, |
| GPU | Armmali -G52 |
| ROM / ROM | 16 GB RAM and 256GB ROM |

| WIRELESS | |
|---|---|
| Wi-Fi | Wi-Fi 2.4G/5G |
| Bluetooth | 5.2 |

| BUILTIN CAMERA AND MICROPHONE | |
|---|---|
| Camera | 4K 50 MP Camera Built-in |
| Output Power | 8 Array Mic (Auto Voice & Face) Tracking |

| POWER & AUDIO | |
|---|---|
| Power Requirements | 100-240V ~50/60Hz |
| Standby Power, Overall Power (nominal) | ≤5W, 158W |
| Speaker Type and Power | Built-in Speaker, 20W x 2 |

| PC MODULE (Optional) | |
|---|---|
| Model | 14 Series |
| CPU | Intel®Core™ i7, 14th Gen |
| RAM | 16 GB |
| SSD (optional) | 512 GB |
| Graphics | Intel® HD Graphics |
| Networking | 10/100/1000M |
| Wi-Fi | 802.11ac (2.4 GHz/5 GHz) |
| Operating System | Windows 10 / Windows 11 |
| USB 3.0 | 2 |
| USB 2.0` | 4 |
| LAN (RJ45) | 1 |
| HDMI Output | 1 |
| Line Out / Mic In | 1 / 1 |

| PHYSICAL SPECIFICATIONS | |
|---|---|
| Dimension(L x W x H) | 1485 x 901.1 x 103.2 mm |
| Dimension (package) L x W x H | 1650 x 200 x 1030 mm |
| Net Weight | 34 Kg |
| Gross Weight | 45 Kg |
| VESA | 500 x 400 mm |

| ENVIRONMENTAL CONDITIONS | |
|---|---|
| Operating Temperature | 0 - 40°C |
| Operating Humidity | 10% - 80% |
| Storage Temperature | -10°C - 45°C |
| Storage Humidity | 5% - 90% |

## ACCESSORIES (OPTIONAL)

Movable Trolley



Speaker Phones



Camera External with Mic



Nedo Pakistan
Leading IT Company
KARACHI | LAHORE | ISLAMABAD
www.nedopakistan.com
UAN : 021-111-633-675

cloud
Guangzhou Cloud Electronic Co.
1st Floor, C19 Building, Huachuang Animation Industrial Park, Jinshan Cun, Shiqi Town, Panyu District, Guangzhou, China
Emal: info@cloud-sol.com